
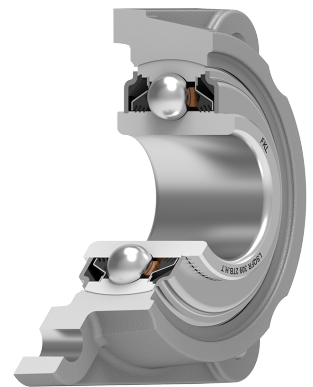
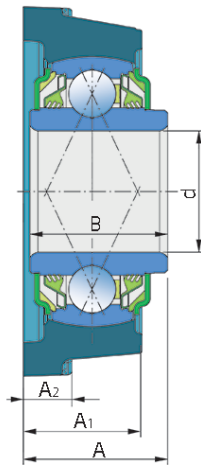


Bearing Unit

LSQFR 309 2TB.H.T

Bearing Unit
Packer Roller

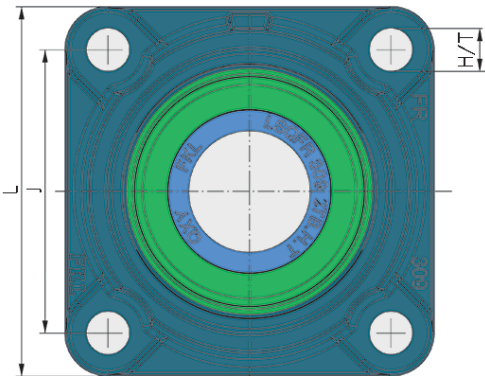

Technical Specification

Co	Static load rating	59.6 kN
J	Pitch circle diameter	105 mm
H/T	Hole/Thread	14 mm
d	Bore diameter	45 mm
L	Total length	137 mm
kg	Mass	3.4 kg
J	Distance between the holes	80.8 mm
A	Overall width	53 mm
A1	Total housing width	44 mm
A2	Housing flange thickness	18 mm
Cdyn	Dynamic load rating	80.8 kN

Sealing

T SEAL / T SEAL+PROTECTIVE METAL RING+RUBBER FLINGER RING

3-lip seal on the base side and 3-lip seal with Metal-rubber flinger ring on the front side which is exposed to contaminants.

The 3-lip seal on the front side protects the bearing from contaminant penetration.

The Metal-rubber flinger ring protects the seal from mechanical damage and provides additional sealing.

